

Only diving and/or sliding equipment designed for use in swimming pools must be used. Must comply with the BNQ 9461-100/2009 standard and the equipment manufacturer's specifications. For additional safety we strongly advise against the use of such equipment.


| 69'-3" Date 19-mars-2025 | 69'-3" | Perimeter               |
|--------------------------|--------|-------------------------|
| 265 Scale Not to scale   | 265    | Surface (square. foot.) |
| N/A #Drawing SP25-076-39 | N/A    | Volume (Liters)         |
| 14/7  #Diawing Si 25     | 11// \ | Volume (Elicis)         |


## Rectangle 11-5 x 23-3



|      |        |        |    | - 1 |  |
|------|--------|--------|----|-----|--|
| N/In | terial | lict t | or | DAA |  |
|      |        |        |    |     |  |

| Code        | Description                               | Qty   |
|-------------|---|-------|
| 20H0008F-M  | Block Mosaïc Screwed Mosaïc Side(16"1/2") | 108   |
| 20A0040     | Soles                                     | 40    |
| AQ-CPFM-10N | Coping for pool - 10'                     | 7     |
| Rods        | Total Rods 10mm                           | 1210' |
| N/A         | Concrete for wall (m3)*                   | 4     |



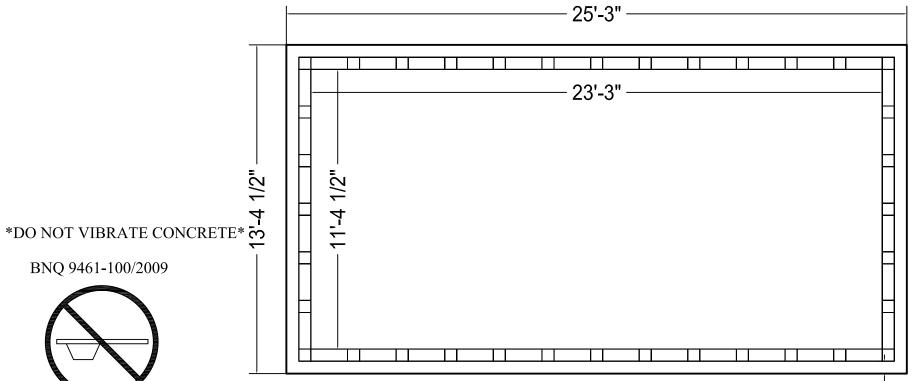

BNQ 9461-100/2009



**NON-CONFORMING** 

for diving board

6" thick reinforced concrete slab