ReturnLED

Owner's Manual

GoPool

GoPool

Warranty registration

Thank you for choosing GoPool! Register your product today to activate your warranty and get quick, hassle-free support when you need it.

Scan to register your product warranty

⚠️ **WARNING**

This equipment must be installed and serviced according to the information found in this manual. Improper installation can create hazards which could result in property damage, serious injury or death. Improper installation will void the warranty.

Table of contents

Use only GoPool genuine replacement parts.
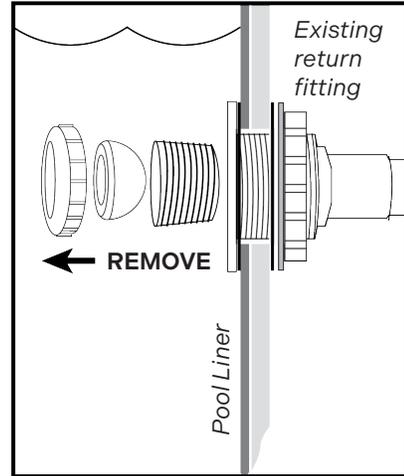
Installation

TURN OFF POOL PUMP BEFORE STARTING INSTALLATION.

STEP 1

From existing return fitting, unscrew large, ribbed nut and remove eyeball. Unscrew inner sleeve (Keep these parts in case you remove the return fitting light).
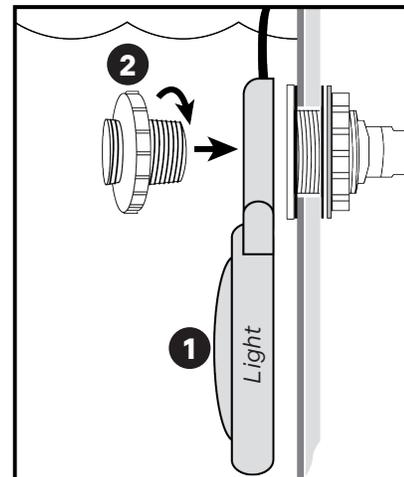
DO NOT UNSCREW EXISTING RETURN FITTING.
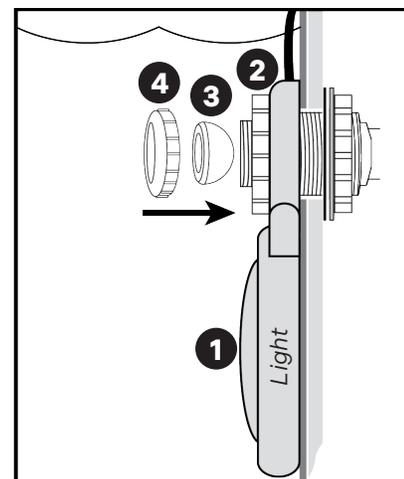
STEP 2

Install return fitting light **1** over the return fitting. Align and secure in place with large nut **2**.

DO NOT OVERTIGHTEN.

STEP 3

Insert eyeball **3** (included) at desired angle and secure using ribbed nut **4** (included).
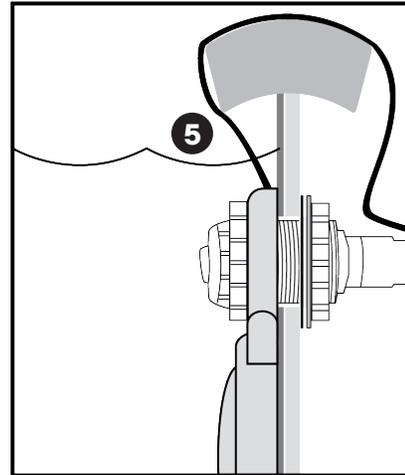
Installation

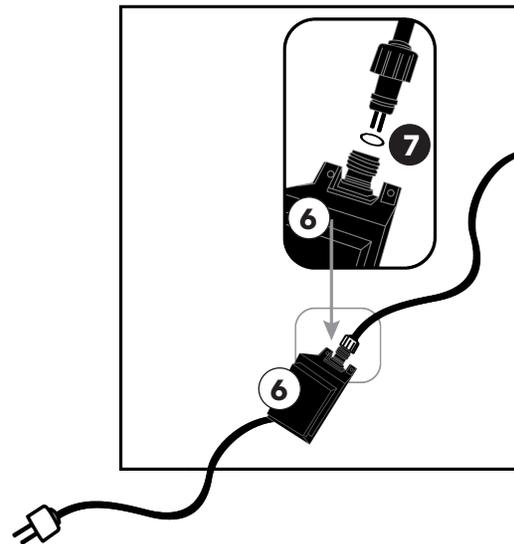**STEP 4**

Make sure the electrical cord **5** and transformer **6** are out of the water.

STEP 5

Slide plastic O-ring **7** onto transformer plug. Insert pins into transformer outlet and secure with cap.
The transformer **6** should be plugged into a GFCI outlet.

WARNING

- Risk of electrical shock, if instructions are not followed. Connect only to a grounded GFCI outlet that is a minimum of 10 feet (3 m) away from the pool. DO NOT USE EXTENSION CORDS.

- Do not let children use this device unsupervised.

- For use on permanent above-ground pools only.

- Do not use the light if the lens, transformer or cord is damaged.

WINTER STORAGE:

Freezing weather may damage light fixture. Disconnect light and remove from the pool. Store in dry space at room temperature.

> **NOTE -**
> See Remote Control Instructions for Operating and Pairing Remote.

GoPool